

(19) World Intellectual Property
Organization
International Bureau



542 401

(43) International Publication Date
5 August 2004 (05.08.2004)


PCT

(10) International Publication Number
WO 2004/065892 A1

- (51) International Patent Classification⁷: **F42D 5/045**, (74) Common Representative: **MCKENZIE, John**; 97-101 Dale Street, Liverpool L2 2JD (GB).
- (21) International Application Number: **PCT/GB2003/000293**
- (22) International Filing Date: 17 January 2003 (17.01.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **PROJECTILE LIMITED** [GB/GB]; 97-101 Dale Street, Liverpool L2 2JD (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **OGDEN, Ernest** [GB/GB]; 20 Thirlmere Drive, Litherland, Liverpool L21 5JW (GB). **MCKENZIE, John** [GB/GB]; 8, North Road, Waterloo, Liverpool L22 0NS (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **BLAST ATTENUATING, BLAST-DIRECTING AND EXTINGUISHING APPARATUS**

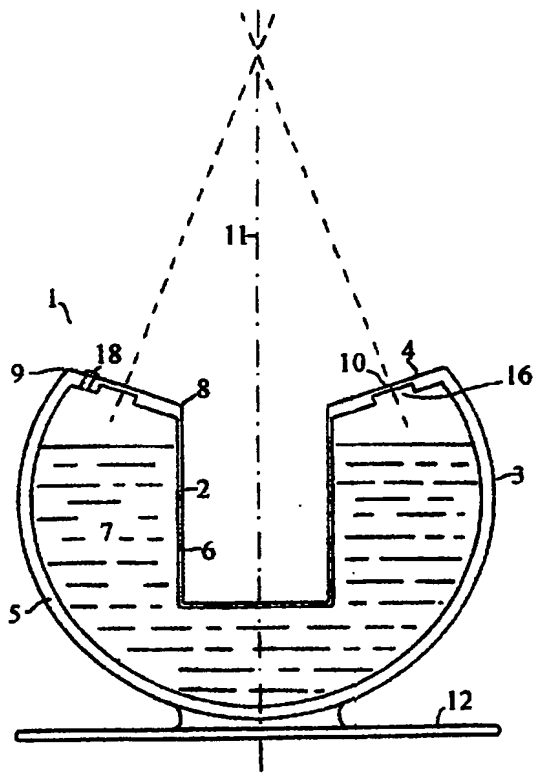

(57) Abstract: An apparatus by which to attenuate, direct or extinguish the resultant effects of a blast or explosion. This includes the use of a spherical interior skinned apparatus (1) with an inner container (2) that will deform and/or rupture easily in the event of a blast or explosion therein. Membrane (16) rupture will occur on compression of fluid (7) and air initially directing fluid/material and debris in a less harmful direction. The apparatus (1) can be a fixture, re-usable and portable for on site location. The apparatus (1) will be constructed based on the anticipated force of blast or explosion. The apparatus (1) will be re-usable in certain environments such as in the event of disposal of several blast or explosive items at different locations. The inner walls, which will form the inner container (2), can be replaced in the event of a blast or explosion. The containment fluid (7) and air to be added at location or each application.

WO 2004/065892 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.